





INFORMATION FOR FIRST AND SECOND RESPONDERS

EMERGENCY RESPONSE GUIDE



TESLA
CYBERTRUCK 2023+
ELECTRIC

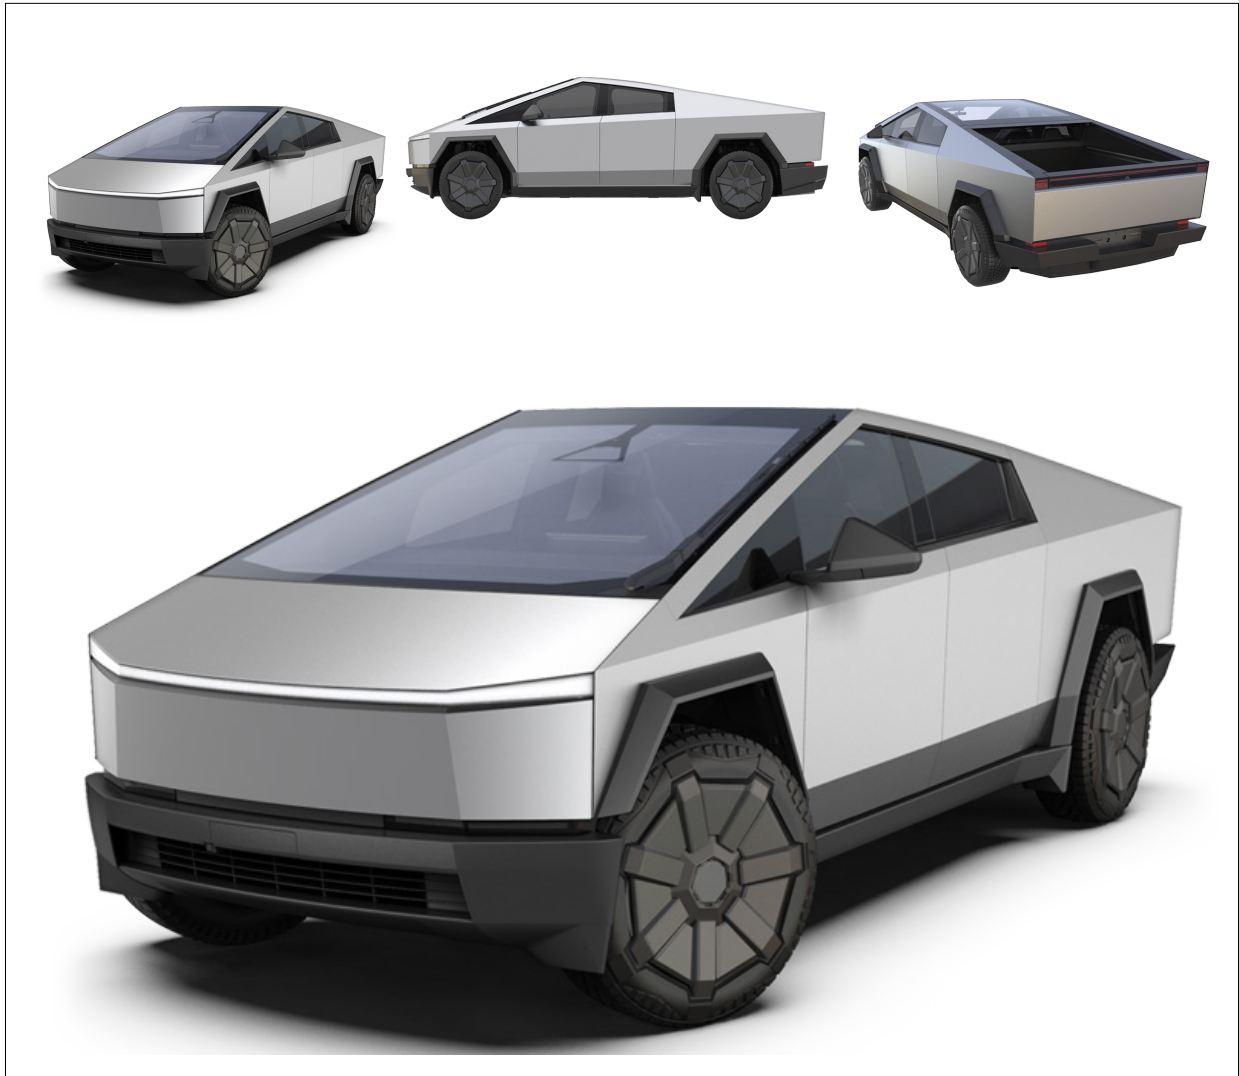

VERSION: 001



CONTENTS

0. Rescue Sheet(s)	Page 1
1. Identification / recognition	Page 3
2. Immobilization / stabilization / lifting	Page 6
3. Disable direct hazards / safety regulations	Page 8
4. Access to the occupants	Page 15
5. Stored energy / liquids / gases / solids	Page 23
6. In case of fire	Page 27
7. In case of submersion	Page 29
8. Towing / transportation / storage	Page 30
9. Important additional information	Page 33
10. Explanation pictograms used	Page 34



TESLA CYBERTRUCK

From 2023—Present
4 doors / 5 seats / Truck

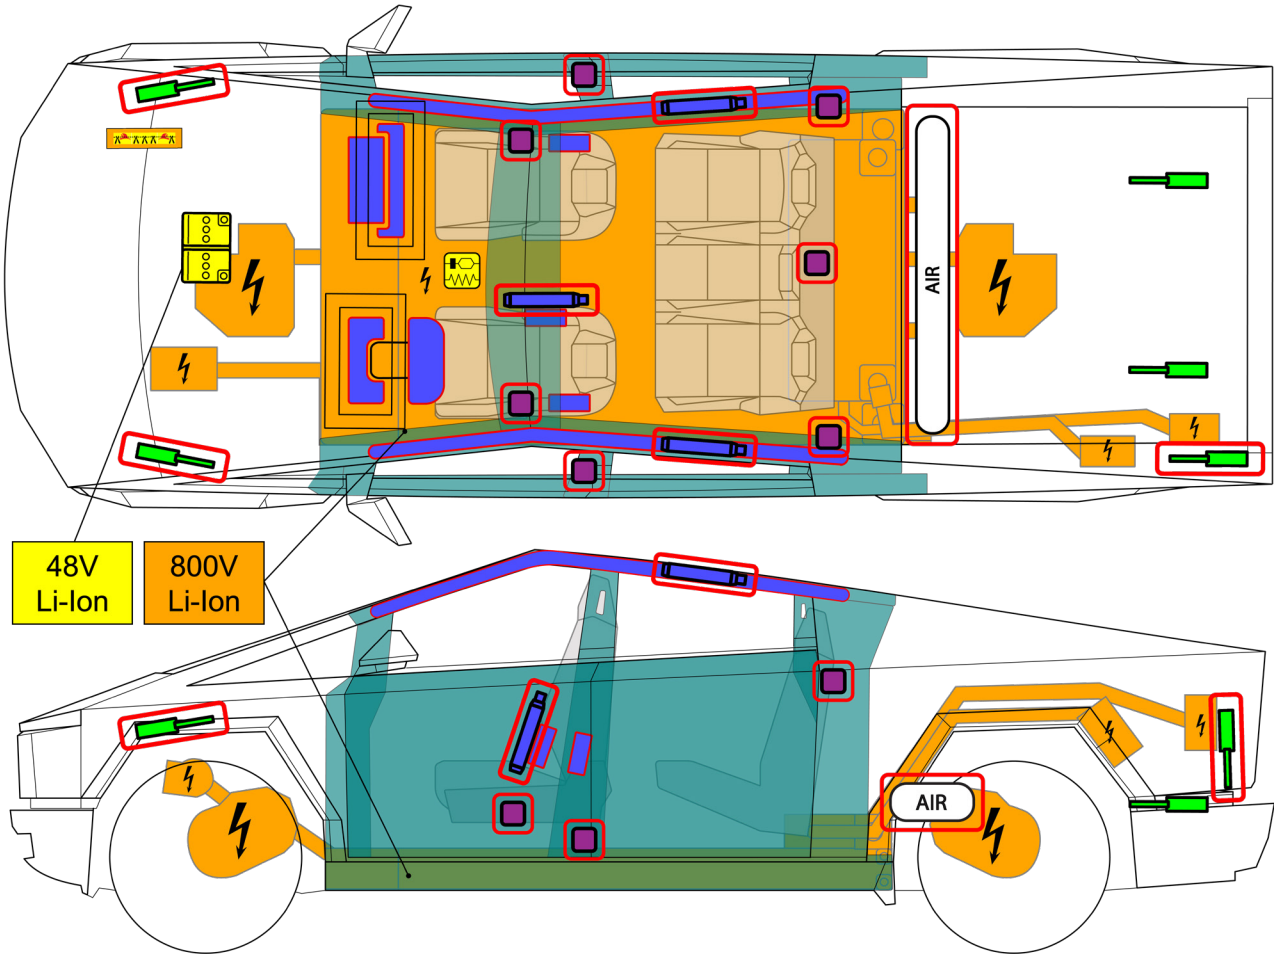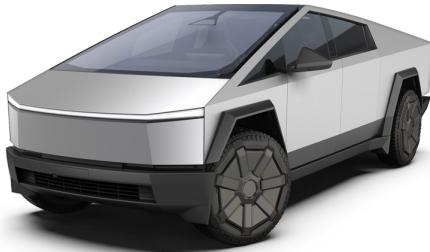



NOTE: Not all features present in all trims.

	Airbag		SRS control unit		Stored gas inflator		Seat belt pre-tensioner		Gas strut / Preloaded spring
	Battery low voltage		Battery pack, high-voltage		High voltage power cable		Cable cut		High strength zone
	Air tank		High voltage component						



TESLA CYBERBEAST

From 2023—Present
4 doors / 5 seats / Truck

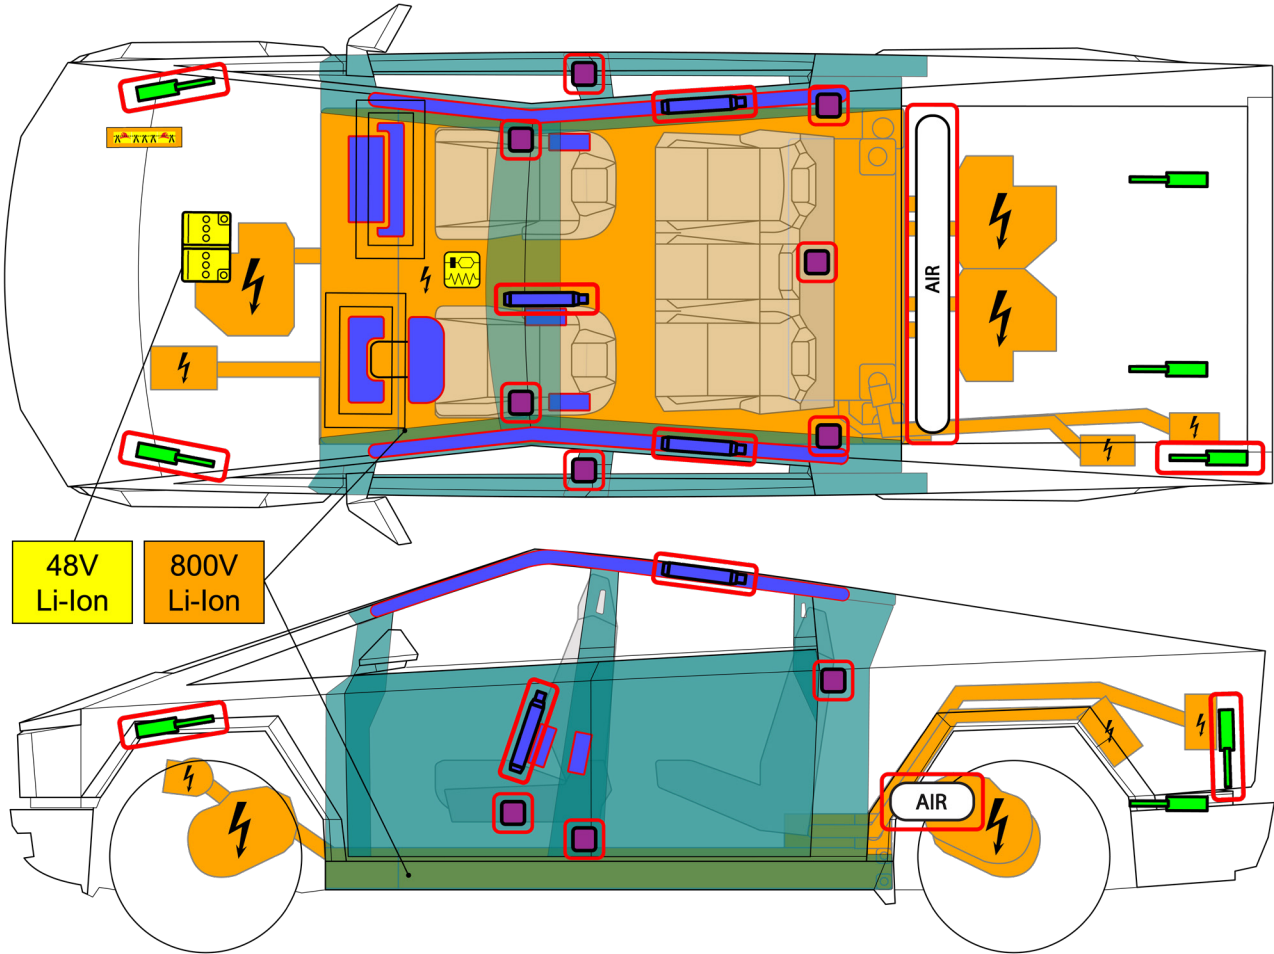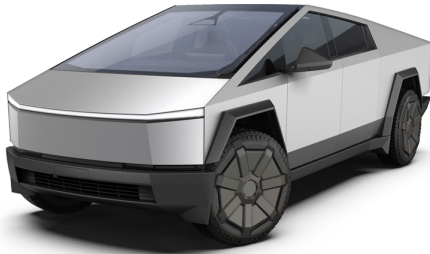

NOTE: Not all features present in all trims.

	Airbag		SRS control unit		Stored gas inflator		Seat belt pre-tensioner		Gas strut / Preloaded spring
	Battery low voltage		Battery pack, high-voltage		High voltage power cable		Cable cut		High strength zone
	Air tank		High voltage component						


1. Identification / recognition




WARNING LACK OF ENGINE NOISE DOES NOT MEAN VEHICLE IS OFF: SILENT MOVEMENT OR INSTANT RESTART CAPABILITY EXISTS UNTIL VEHICLE IS FULLY SHUT DOWN. WEAR APPROPRIATE PPE.

Form Factor, Light Bars, and Door Handles

Cybertruck can be identified by the unique form factor and silhouette of the vehicle, as well as the front and rear light bars. The model name does not appear on the vehicle.

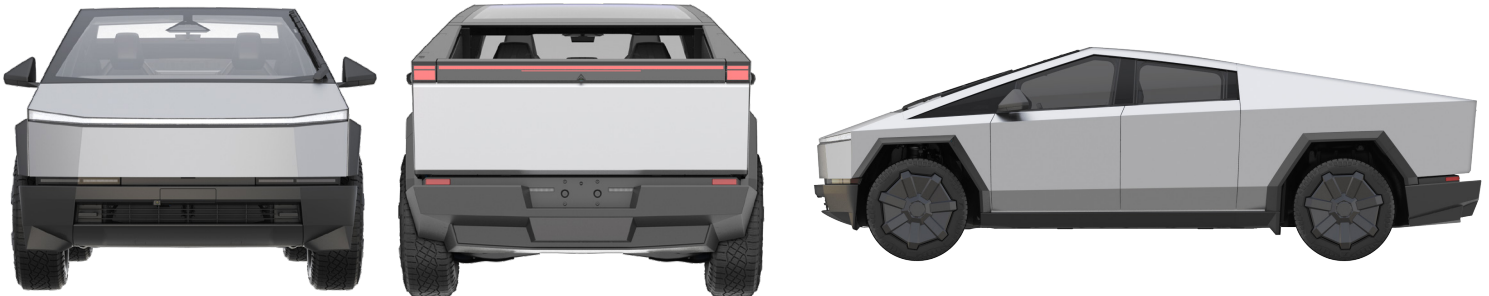

The door handles blend in with the B and C pillars and can be pressed here:

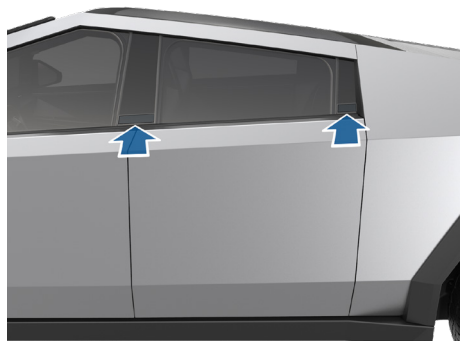


The tri-motor performance variant features a Cerberus head emblem on the bottom right corner of the tailgate.



Vehicle Identification Number (VIN)

Cybertruck can be identified by its VIN. Locate the stamped plate under the driver's side of the windshield by lifting the windshield wiper and looking towards the top of the A-pillar. The VIN can also be found on the driver's side door pillar. On some vehicles, the VIN can alternatively be found either under the carpet beneath the front passenger seat or on a label stamped by the rear right door under the interior trim.

If the touchscreen is operational, you can check the VIN by navigating to **Controls > Software**.

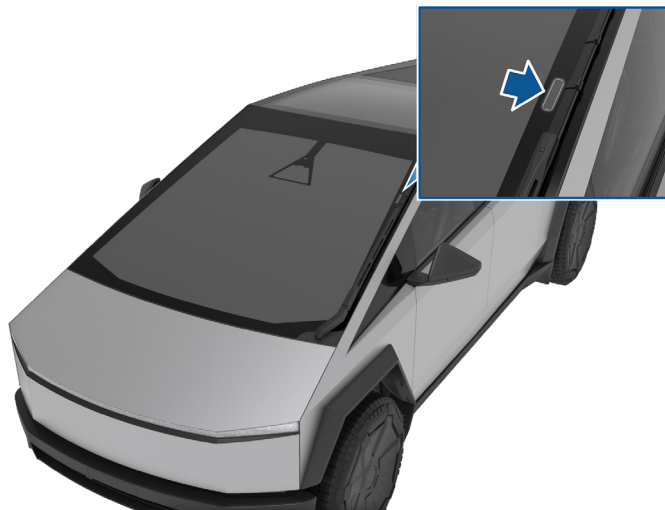

Touchscreen and Cabin

Cybertruck can be identified by the large touchscreen mounted in a "landscape" orientation and the steering yoke.

The tri-motor performance variant also features a more luxurious interior with an alcantara fabric dashboard. The long-range single motor variant does NOT have a rear touchscreen.




Refer to the [Owner's Manual](#) for information on touchscreen operation. After a collision or if vehicle airbags have deployed, low voltage power may not be available and the touchscreen may not be operational. Trying to support low voltage power on a vehicle that has been in an accident could lead to a possible electrical fire. Do not attempt to reconnect low voltage power after an accident.

Keys

Cybertruck supports 2 types of keys.

- **Authenticated phone** – A personal smartphone can be set up to communicate with Cybertruck using Bluetooth. If a smartphone is already paired to the vehicle, open the Tesla mobile app on the smartphone and navigate to CONTROLS to unlock or lock Cybertruck.
- **Key card** – Tap the Cybertruck key card on the driver's side door pillar to access the locked vehicle. You can also tap the key on the wireless phone charger to enable driving functionality.

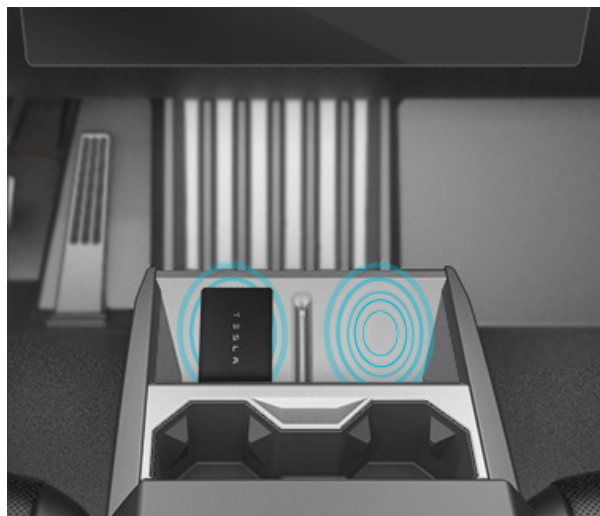


2. Immobilization / stabilization / lifting

IMMOBILIZATION

1. Chock wheels

Cybertruck moves quietly, so never assume it is powered off. Cybertruck may not move unless the accelerator pedal is pressed, even if shifted into Drive or Reverse. However, never assume that Cybertruck will not move. Always chock the wheels.

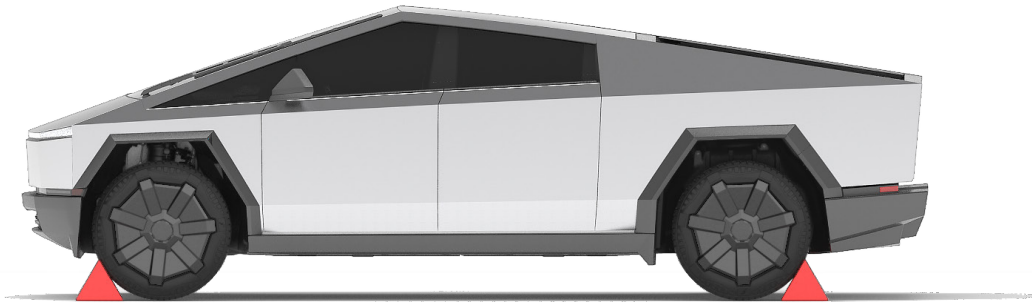

2. Put vehicle into Park position

Pressing the accelerator pedal even slightly can cause Cybertruck to accelerate quickly if the active gear is Drive or Reverse. To ensure that the parking brake is engaged, press and hold the Park (P) button on the touchscreen to shift into Park and enable the parking brake. You can also press and hold Park (P) on the drive mode selector on the overhead console. Whenever Cybertruck is in Park, the parking brake is automatically engaged and the touchscreen shows the active gear as Park (P).

The buttons on the drive mode selector only illuminate when touched and are as follows:


1. Park
2. Reverse
3. Neutral
4. Drive



STABILIZATION / LIFTING POINTS

The high voltage battery is part of the floor of the vehicle. Much of the undercarriage is the high voltage battery. When lifting or stabilizing Cybertruck, only use the designated lift areas, as shown in green.

- **WARNING** Be careful to not damage the battery pack while stabilizing / lifting the vehicle.
- **WARNING** The vehicle should be lifted or manipulated only if first responders are trained and equipped at the technician level per National Fire Protection Association (NFPA) and are familiar with the vehicle's lifting points. Use caution to ensure you never come into contact with the high voltage battery or other high voltage components while lifting or manipulating the vehicle.
- **WARNING** DO NOT USE THE HIGH VOLTAGE BATTERY TO LIFT OR STABILIZE CYBERTRUCK.

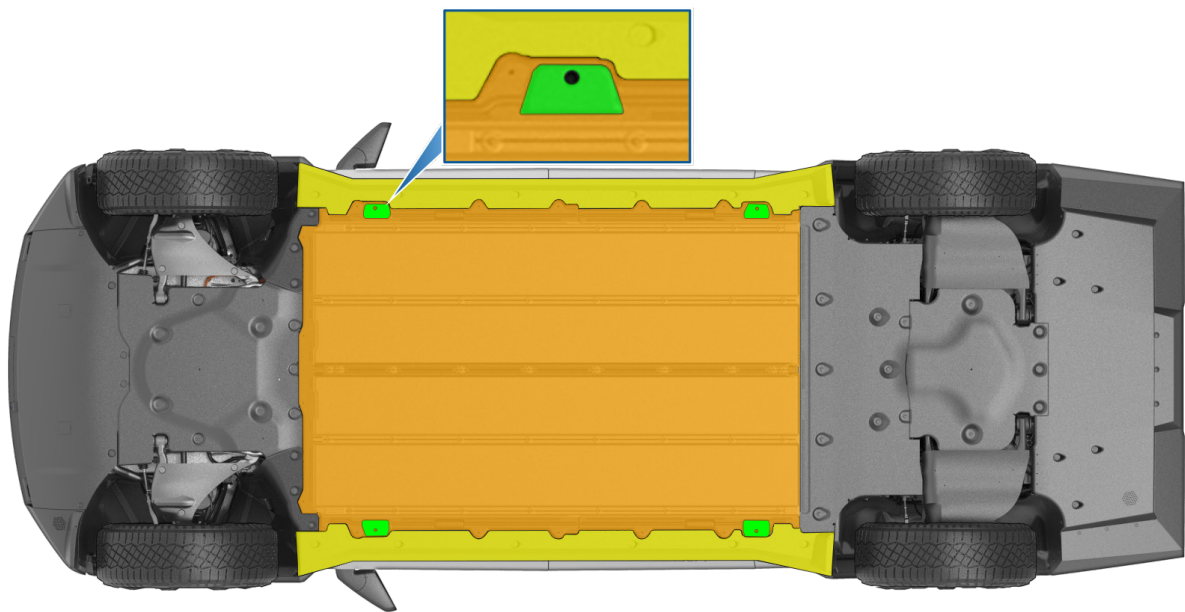

	Appropriate lift areas
	Safe stabilization points for a Cybertruck resting on its side
	High voltage battery

3. Disable direct hazards / safety regulations


ACCESS

1. Open the hood (see chapter 4: Access to the Occupants).
2. Remove the access panel by pulling it upward to release the clips that hold it in place.



MAIN DISABLING METHOD

1. Double cut the first responder loop and then remove the cut section. Cutting the first responder loop isolates high voltage power to the high voltage battery and cuts low voltage power to the airbags.

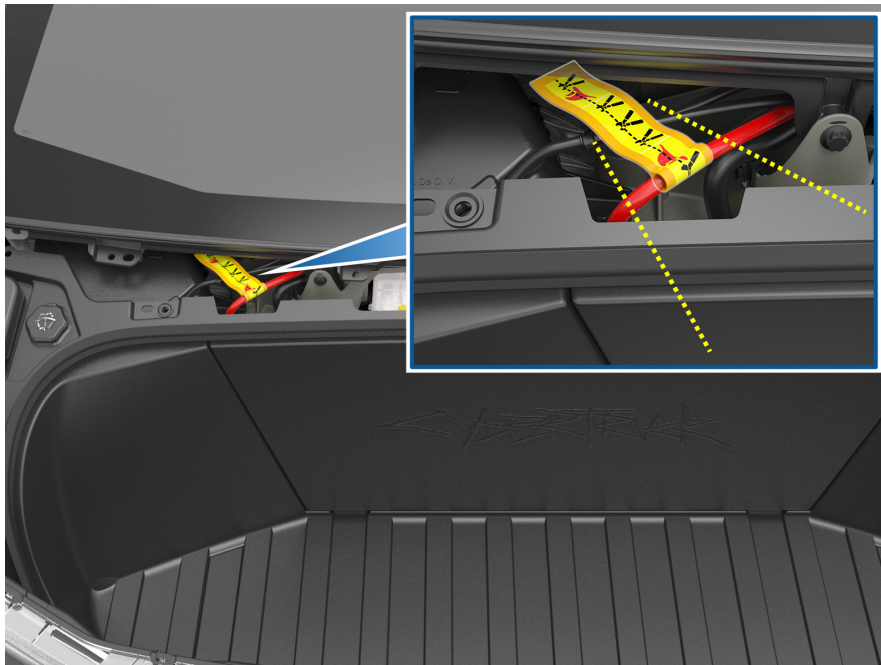

WARNING Not every high voltage component is labeled. Always wear appropriate PPE. Always double cut the first responder loop. Do not attempt to open the High Voltage (HV) battery.



COMPLETE DE-POWER

A complete de-power of the vehicle cuts power to the low voltage system and high voltage systems. A de-power disables all electrical systems, as well as basic vehicle functionality such as moving seats and interacting with the touchscreen. Note also that cutting the cables of the low voltage battery alone doesn't necessarily disable the low voltage system due to system redundancies. You must cut the First Responder Loop as well to de-power the vehicle.


1. Access the First Responder Loop under the hood.
2. Double cut the First Responder Loop and then remove the cut section.
3. Double cut the negative cables to the low voltage battery.
4. Wait 2 minutes for the vehicle to finish de-powering.



WARNING Regardless of the disabling procedure you use, ALWAYS ASSUME THAT ALL HIGH VOLTAGE COMPONENTS ARE ENERGIZED! Cutting, crushing, or touching high voltage components can result in serious injury or death.



WARNING When using the high voltage shut down methods recommended by this document, high voltage power is isolated to the battery. The high voltage battery is always energized.



First Responder Loop Cable Cut


When cut, the First Responder Loop disables low voltage power going to the airbag circuit. Cutting of the First Responder Loop also removes low voltage power going to the high voltage contactors inside the high voltage battery pack, setting the high voltage contactors to "off," or "open." Cutting the low voltage battery cable may not disable all of the low voltage system, and it could disable the use of vehicle immobilization controls, seat controls, touch screen information, and other features.

The First Responder Loop is located under the hood on the passenger-side of the vehicle for left-hand drive vehicles.


The high voltage contactors disconnect the High Voltage Battery from the rest of the high voltage components, like a light switch. When "open" or in the "off" position, high voltage is present only in the battery pack. When "closed" or in the "on" position, battery pack voltage is connected to the other high voltage components. On Cybertruck vehicles, those high voltage components include the rear drive unit, the front drive unit, the air conditioning compressor, and potentially the charge port. When you cut the First Responder Loop, the high voltage contactors open to isolate the high voltage to the battery pack.

When the vehicle has been in an accident and the First Responder Loop has been cut, always treat the pack and the high voltage components as if they are live, because the pack will still have stored energy within the cells and it is not known if other high voltage components have been damaged. Treat every orange cable and battery pack as if there is high voltage in them. Never cut an orange high voltage cable or cut into the battery pack.

There is no way to instantaneously discharge the energy that is inside of the battery pack when a vehicle is in an accident. There is stored energy in battery cells. Caution must be used to not damage the battery pack in the case of vehicle extrication operations.

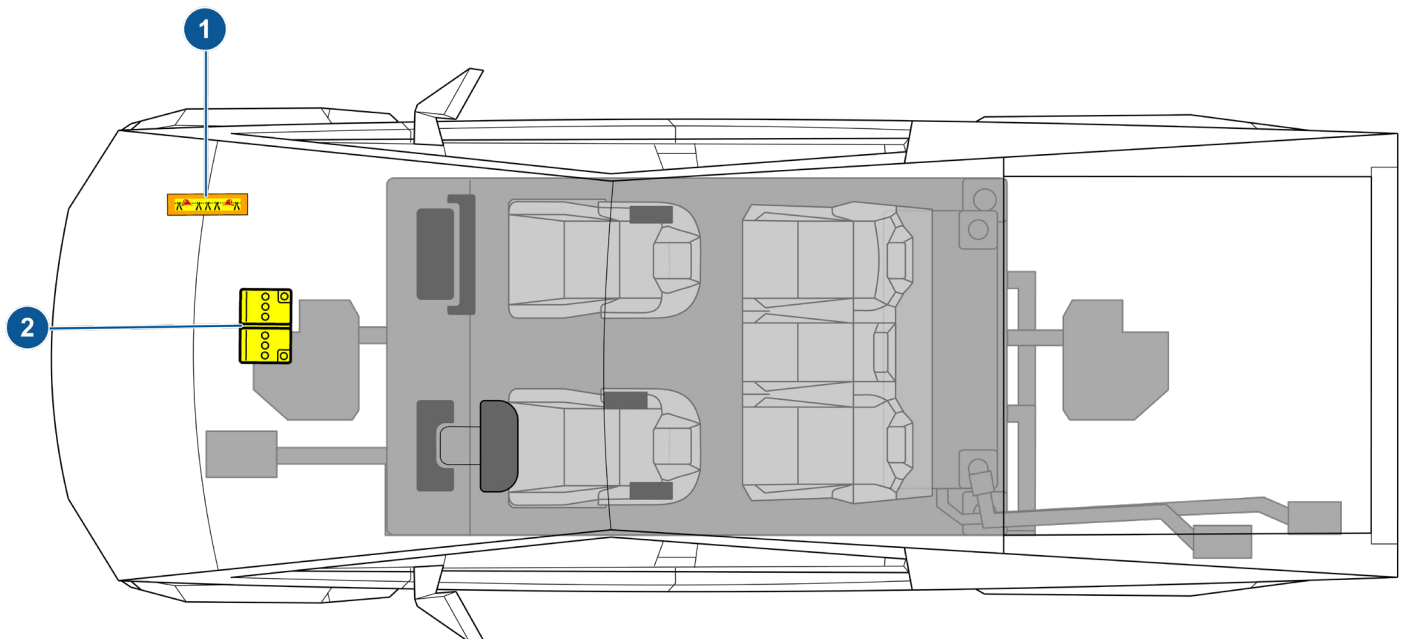

1. First Responder Cut Loop
2. 48V Low Voltage Battery



Access to Low Voltage Battery

When the vehicle's hood is opened, the low voltage battery is accessible underneath the access panel next to the windshield. When necessary, the negative battery cable should be double cut to open the low voltage battery circuit. Care should always be taken to not cut both the positive and negative battery cables at the same time when double cutting the negative battery cable. Cutting both cables simultaneously can short circuit the low voltage battery.



WARNING Cybertruck uses a 48V DC Li-Ion battery. Many locales classify 48V as mid-voltage. Care must be taken when interacting with the low voltage system of Cybertruck.

Disabling a Charging Vehicle

Before attempting to disable the vehicle, unplug the charging cable. If you have access to the cabin, touch **Controls > Charging > Unlock Charge port** on the touchscreen. You can also hold down the button on the charging cable of Tesla chargers if the car is unlocked or a paired key is nearby to unplug the cable without accessing the vehicle cabin.

If the charging cable cannot be unplugged, you can attempt to manually release the charging cable. See Manually Release Charging Cable on page 11.

If the car cannot be unplugged due to a damaged or locked charging cable, turn off power to the charging station. Then, proceed with disabling procedures by double cutting the First Responder Loop.

NOTE: Cybertruck can use Powershare to charge batteries and appliances, or share power with a structure. Treat Cybertruck as a charging vehicle when attempting to disable a Cybertruck using Powersharing. Turn off power to the appliance, battery, or structure instead of the charging station.



WARNING Do not cut the charging cable while the charging station has power. Cutting the charging cable while there is still power can start an electrical fire or cause severe injury.


Manually Release Charging Cable


If you cannot unplug the charging cable, you can attempt to manually release the charging cable instead of cutting it.

1. Lower the tailgate.
2. Remove the trim covering the charge port release cable.
3. Pull the charge port release cable towards the tailgate to unlatch the charger cable.
4. Pull the charger cable from the charge port.



WARNING Do not pull the release cable while simultaneously attempting to remove the charge cable from the charge port. Always pull the release cable before attempting to remove the charge cable. Failure to follow these instructions can result in electric shock and serious injury.

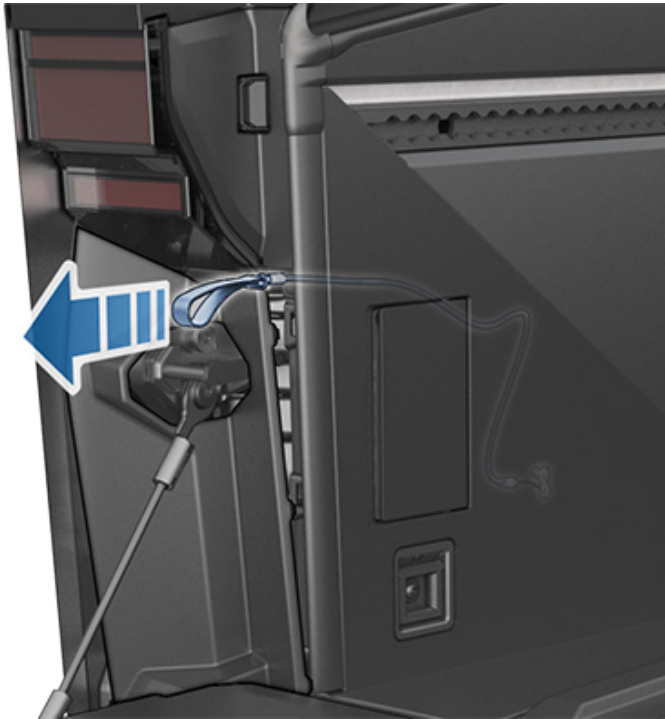




Airbags

Airbags are located in the approximate areas shown. Airbag warning information is printed on the sun visors.

When the airbags have been deployed by the Restraint Control Module (RCM), the pyrotechnic fuse that deactivates the vehicle's high voltage system will be simultaneously triggered.

Cybertruck is designed to deactivate high voltage in all components and cables outside of the high voltage battery when an airbag is deployed. Care must be taken as to not cut any orange high voltage cables or try to gain access into the battery pack. Even though the high voltage system has shut down due to the airbags being deployed, it must always be assumed that there may be high voltage present in the high voltage cables and components. The battery cells within the battery pack will have stored energy and should not be compromised with rescue tools.

The First Responder Loop should be cut in order to open the low voltage circuit that provides power to the airbags. See the First Responder Loop section for more details.

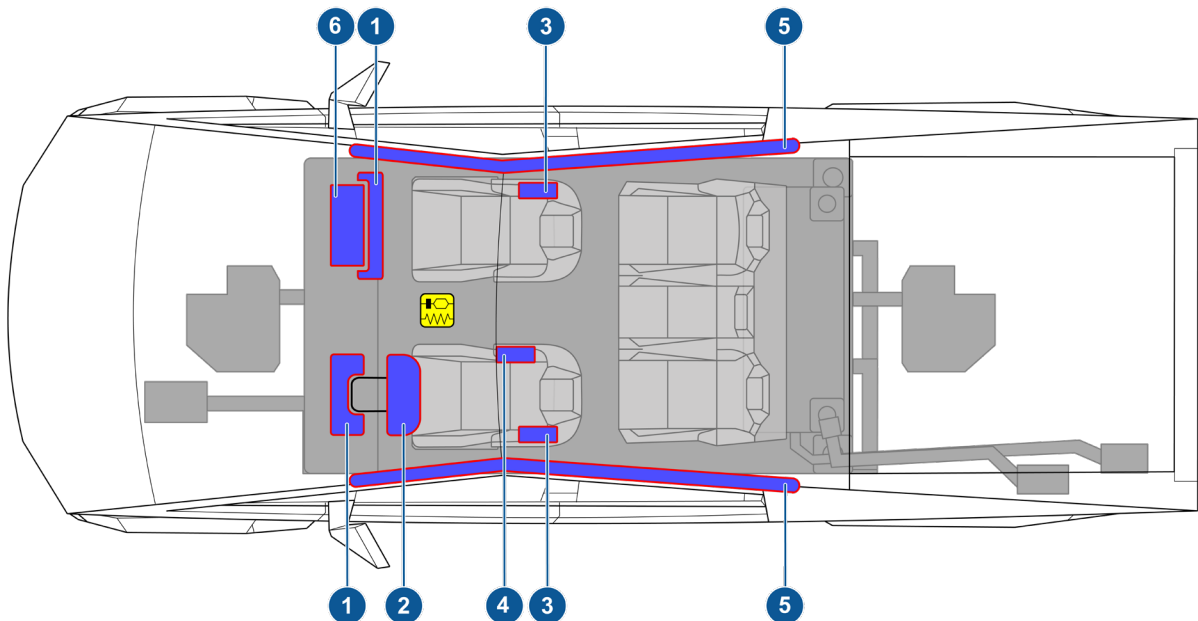

1. Knee airbags
2. Steering wheel airbag
3. Seat mounted side airbags
4. Seat mounted inside airbag
5. Curtain airbags
6. Passenger airbag




WARNING The RCM also has an internal energy reserve which allows it to remain powered for 10 seconds after both high voltage and low voltage power are disconnected. Do not touch the RCM within this 10 second time frame.



Stored Gas Inflators

The stored gas inflators, outlined in red, are located near the roof and towards the rear of the vehicle. An additional stored gas inflator is used for the airbag mounted on the inside of the driver seat. For most variants, there is an additional pressurized air tank located underneath the cargo bed which is used for the air suspension system.

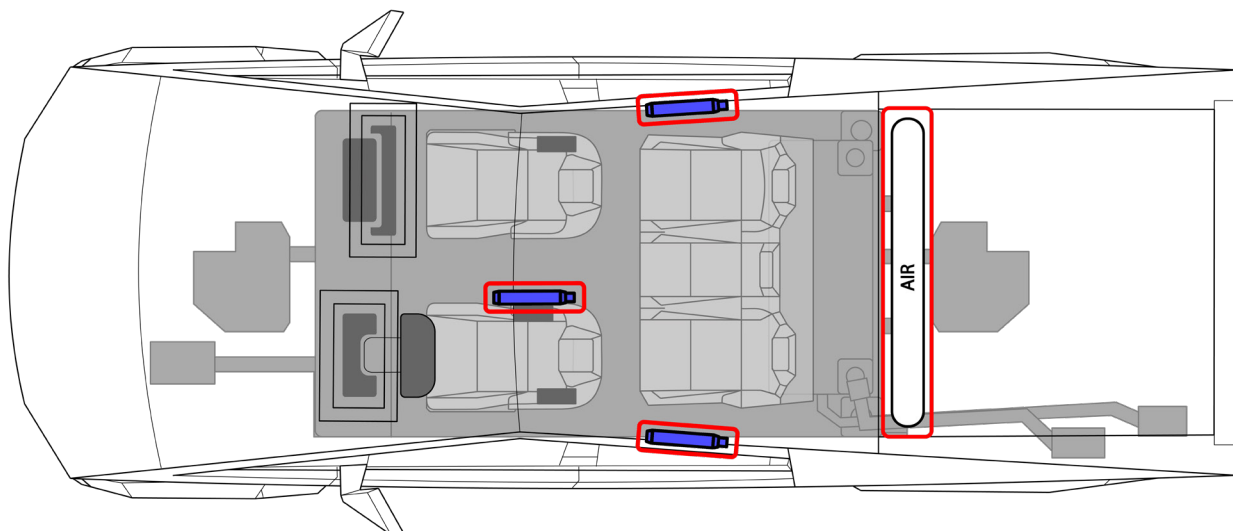

WARNING Rescuers should never cut or crush inflation cylinders. Cutting or compressing cylinders causes catastrophic failure, leading to injury or death.




WARNING The RCM has a backup power supply with a discharge time of approximately 10 seconds. Do not touch the RCM within 10 seconds of an airbag or pre-tensioner deployment.



Seat Belt Pre-Tensioners

The seat belt pre-tensioners, outlined in red, are located at the bottom and top of the B-pillars. There are additional seat belt pre-tensioners for each of the second row seats.

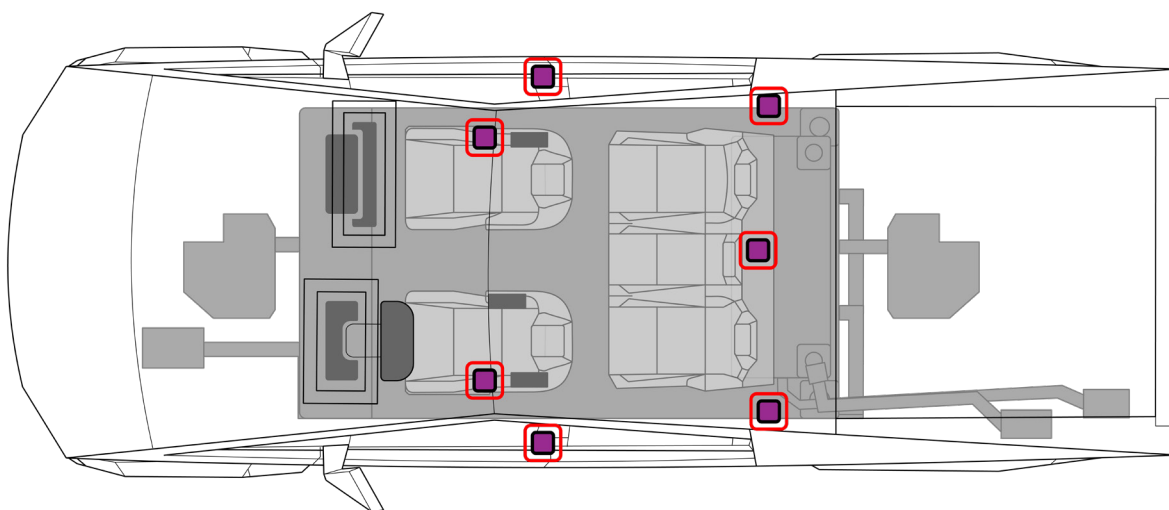

4. Access to the occupants


NOTE: The seats, steering wheel, and interior door buttons are electrically powered and may not function after a collision.

NOTE: After a collision, the doors may not unlock from the outside. Severe collisions may cause doors to be mechanically difficult to operate. Extrication may be required.

Opening Doors from the Outside with Power

To open the Cybertruck doors from the outside, press the door button on the B or C pillars and then pull the door open.

NOTE: If the door buttons do not function, open a front door manually by reaching inside the window and using the mechanical release handle. See Opening Front Doors from Inside without Power.

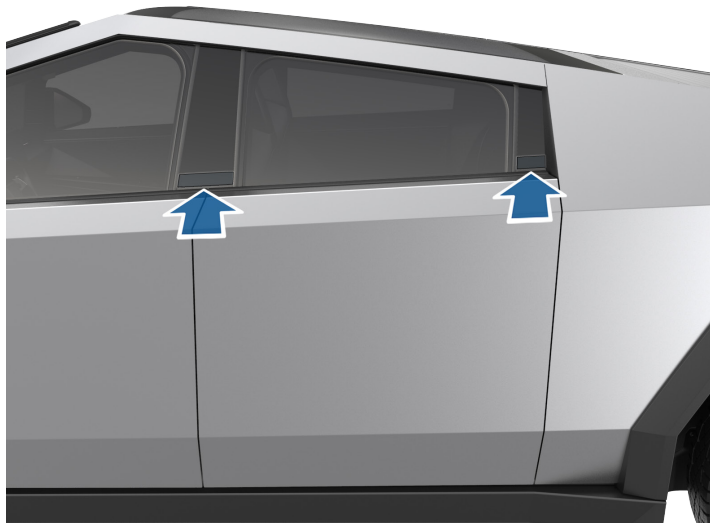


Opening Doors from Inside with Power

To open the Cybertruck doors from the inside with low voltage power available, press the button located near the door panel.



Opening Front Doors from Inside without Power


To open the Cybertruck front doors from the inside without low voltage power, lift the mechanical release handle located near the window switches.

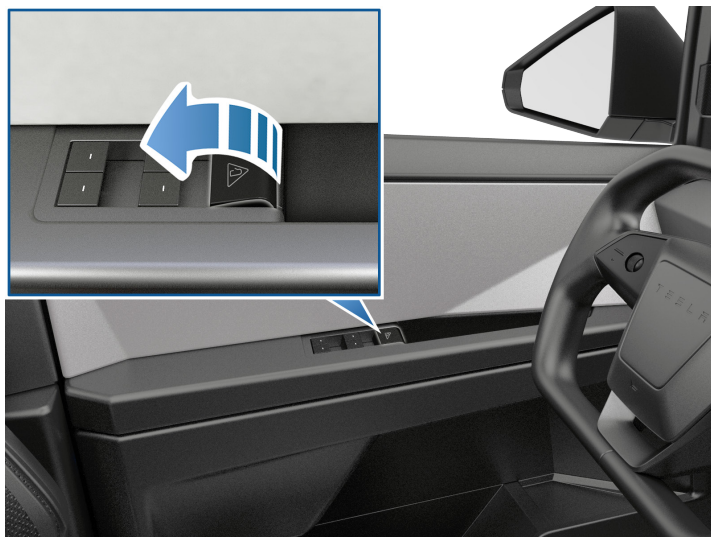

Opening Rear Doors from Inside without Power

To open the Cybertruck rear doors from the inside without low voltage power:

1. Remove the rubber mat at the bottom of the rear door's map pocket.
2. Pull the mechanical release cable forward and push the rear door open. The release cable may be situated beneath a cover.

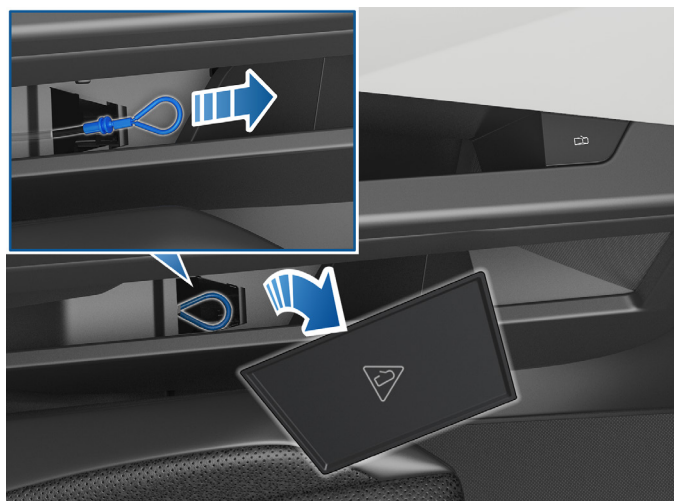


Manual door releases are designed to be used only in situations when the vehicle has no power. It is important to know also that in any vehicle collision with damage to the driver or passenger front door, the mechanical door release may not operate as designed. Remember also that every vehicle accident is different and may require extrication operations to gain access to the vehicle's cabin.



Accessing the Cargo Bed with Low Voltage Power

Use these exterior switches to access the cargo bed when Cybertruck is parked. Fully press and release the tonneau switches to fully open the cover. To open partially, hold the switch and release when ready.

1. Tonneau cover open.
2. Tonneau cover close.
3. Tailgate open.

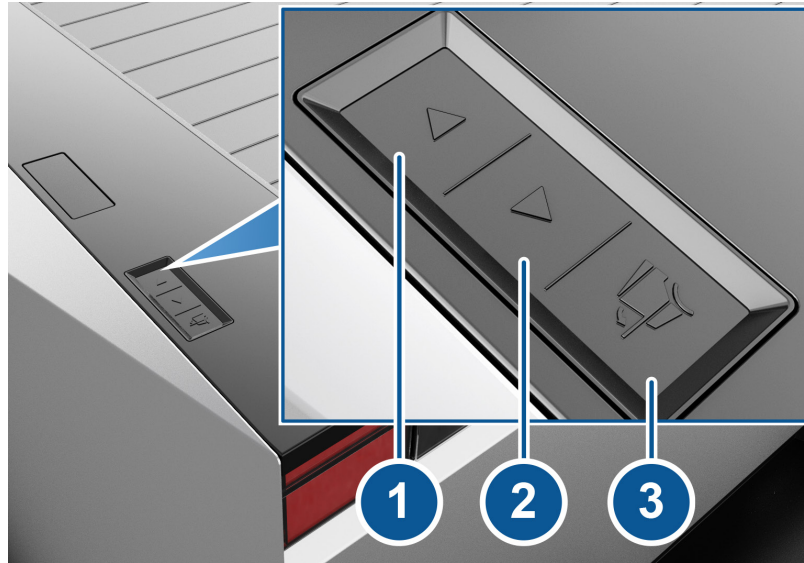

You can also touch **Controls > Tonneau** on the touchscreen to open and close the tonneau cover. Touch **Controls > Tailgate** on the touchscreen to open the tailgate.



Opening the Tailgate without Low Voltage Power

If the low voltage power is unavailable and the tonneau cover is rolled up, you can manually open the tailgate. Flip the cover upward to access the pull strap and pull the strap towards the vehicle cabin.






Accessing the Under Bed Compartment

Cybertruck includes a sealed storage compartment embedded into the cargo bed of the vehicle. To access the under bed compartment, grasp the handle and flip the cover upward. The under bed compartment is supported by a pair of struts, which are non-locking gas springs containing Nitrogen.

Care must be taken if cutting into the cargo bed, due to the presence of the struts and the pressurized air tank.

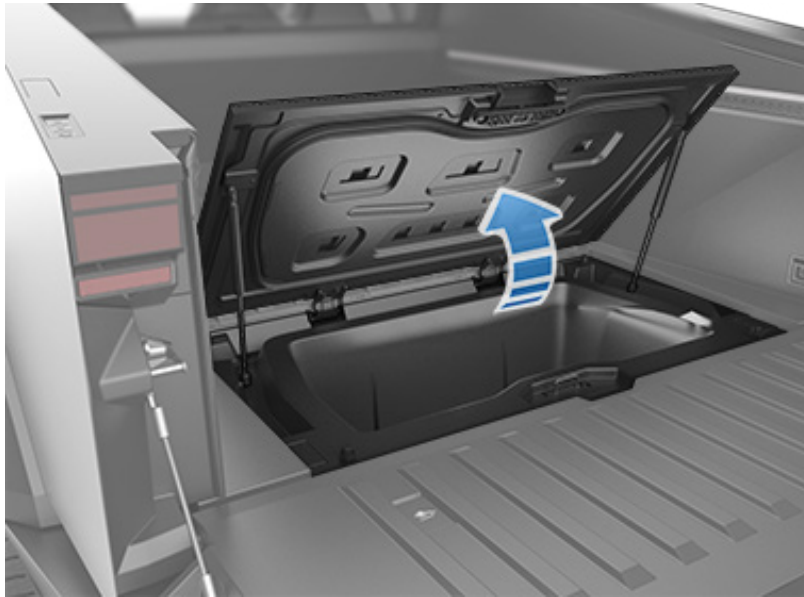



Moving the Front Seats with Power

Cybertruck has electrically powered seats that move with buttons located on the side of the seat closest to the door. The buttons operate only when low voltage power is enabled and can still be used after the First Responder Loop is cut if the low voltage system is intact.


1. Moves seat forward/backward and adjust the seat's height and tilt angle up/down.
2. Adjusts backrest.
3. Adjusts lumbar support.



Opening the Hood with Power

Cybertruck does not have a traditional internal combustion engine. Therefore, the area that would normally house the engine is used as additional storage space. Tesla calls this area the "Front Trunk" or "Frunk". Due to the weight of the hood, the frunk of the Cybertruck is powered.

To open the hood with low voltage power enabled, touch the associated OPEN button on the touch-screen. You can also press the center button under the hood closure.

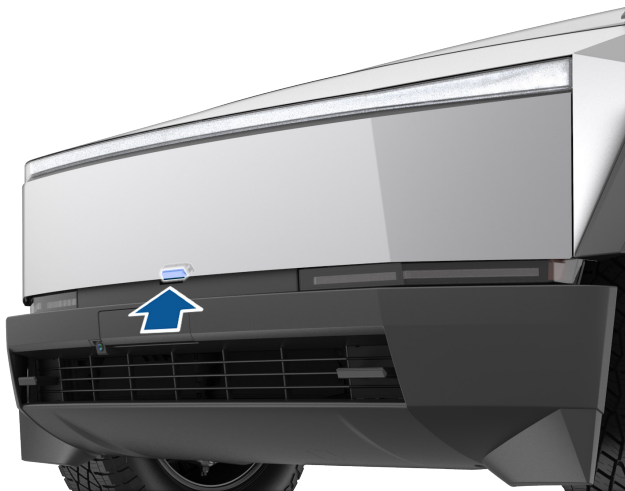




Opening the Hood using an External Low Voltage Power Supply

If low voltage power is not available, you might need an external power supply to open the powered frunk and cut the first responder loop. This method will not open the frunk if Cybertruck is locked and has low voltage power. Use an external power supply, such as a jumper box, for the following:

1. Loosen the cover to the front trunk access terminal and pull it down and toward you to expose the terminals.



2. Pull the two wires out of the cavity to expose the terminals.
3. Connect the external low voltage power supply's red positive (+) cable to the red positive (+) vehicle-side terminal.
4. Connect the external low voltage power supply's black negative (-) cable to the black negative (-) vehicle-side terminal.

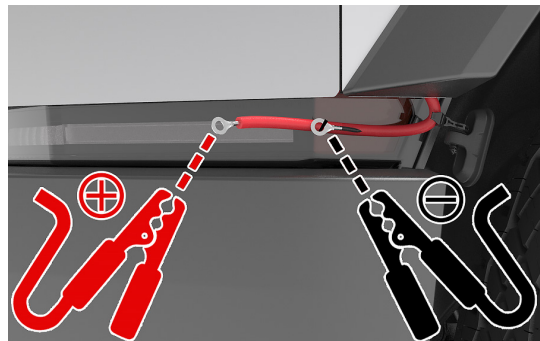

5. Turn on the external power supply (refer to the manufacturer's instructions of your external power supply). The hood latches are immediately released and you can open the hood to access the frunk area.

NOTE: If using a variable power supply, do not change the supplied voltage while cables are connected. Supplied voltage must be between 9V and 16.5V or 30V and 50V.


NOTE: The powered frunk will not open on its own and may be heavy or difficult to lift.

6. Disconnect both external power supply cables immediately after the hood latches release, beginning with the black negative (-) cable.




High Strength Zone

Cybertruck is reinforced to protect occupants in a collision. Suitable tools must be used to cut or crush these areas. Reinforcements are shown in teal below.

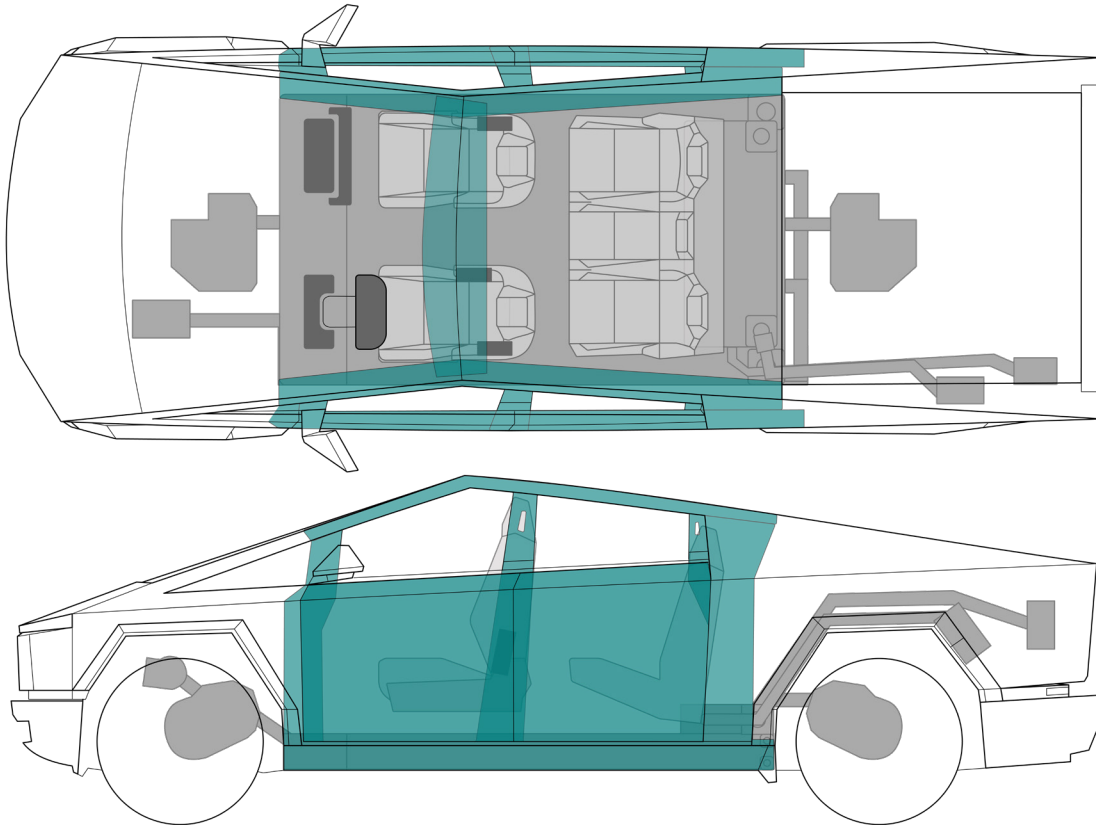

The A, B, and C pillars and the front and rear door rings of Cybertruck are constructed of ultra-high-strength reinforced steel. The front overhead rail is made of high strength steel. The vehicle's doors are made of stainless steel. The outermost layer of the stainless steel on the doors is comparable in strength to the ultra-high-strength reinforced steel of the front door rings. All other structural body components are made up of various strengths of steel and steel-aluminum alloys.

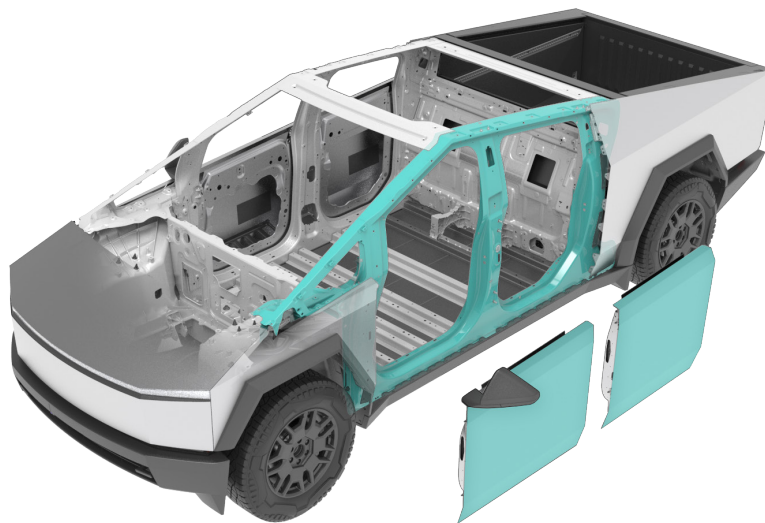



WARNING Always use appropriate tools, such as a hydraulic cutter, and always wear appropriate PPE when cutting Cybertruck. Failure to follow these instructions can result in serious injury or death.




WARNING Regardless of the disabling procedure you use, ALWAYS ASSUME THAT ALL HIGH VOLTAGE COMPONENTS ARE ENERGIZED! Cutting, crushing, or touching high voltage components can result in serious injury or death.

No-Cut Zones


Cybertruck has areas that are defined as “no-cut zones” due to the presence of high voltage, gas struts, SRS components, or other hazards. Never cut or crush in these areas. Doing so could result in serious injury or death. The “no-cut zones” are shown in pink.

NOTE: The following image shows a Dual Motor vehicle. Vehicles without a front drive unit are similar. Tri-motor variants have an additional rear drive unit.

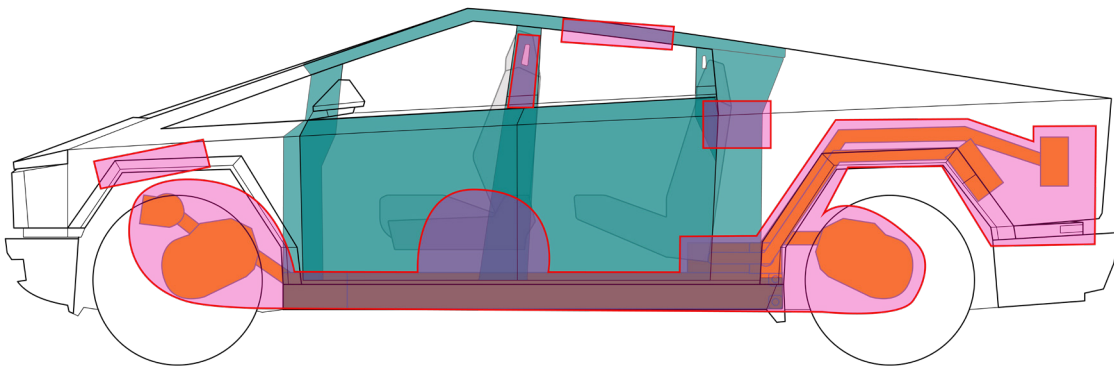


Windows

The windshield, roof, and moving side windows are all made of laminated safety glass. The glass for the rear window and front quarter window are tempered safety glass.

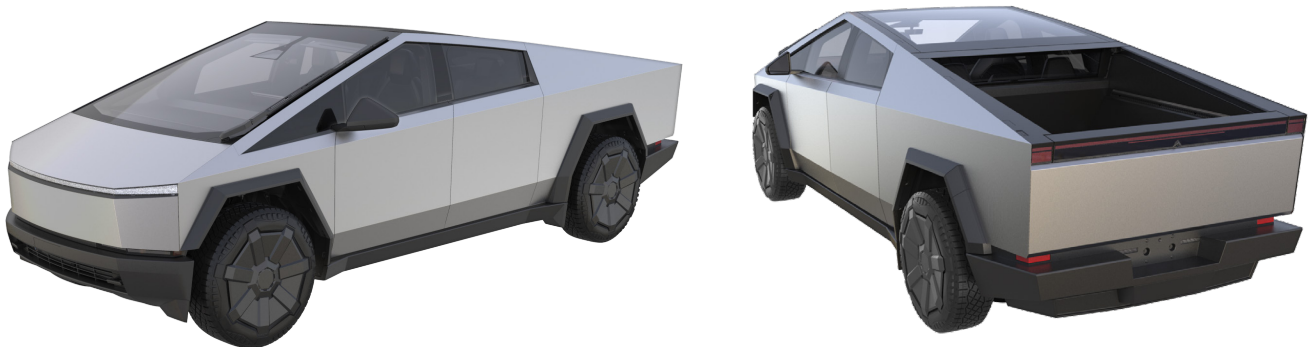

NOTE: Cutting laminated safety glass can create a lot of glass dust. Consider additional respiratory PPE for both crew and passengers when cutting laminated windows.

5. Stored energy / liquids / gases / solids

	  	48V
	     	800V




WARNING Clear liquid is likely water. Battery electrolyte is clear, but battery cells are sealed and have a limited volume of electrolyte per cell. The coolant is blue or orange.

NOTE: The following images show a Dual Motor vehicle. Vehicles without a front drive unit are similar. Tri-motor variants include an additional rear drive unit.



High Voltage Components

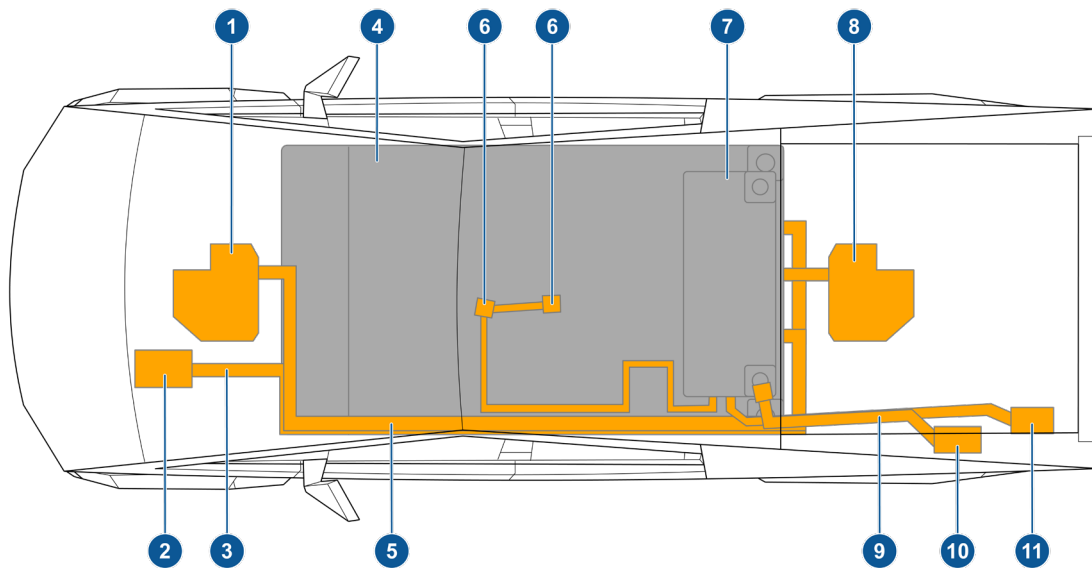


1. Front Drive Unit
2. Air Conditioning Compressor
3. High Voltage Cabling
4. High Voltage Battery
5. High Voltage Cabling
6. Cabin AC Outlets
7. High Voltage Battery Service Panel
8. Rear Drive Unit
9. High Voltage Busbars and Cables
10. Charge Port
11. Cargo Bed AC Outlet



High Voltage Battery Pack

Cybertruck is equipped with an 800V lithium-ion high voltage battery that helps form the floor the vehicle cabin. The battery is made up of many cells that are liquid cooled with coolant. The coolant will appear blue or orange in color and may leak from the battery pack if the pack has been compromised during a vehicle collision. The battery cells will have stored energy within them. Never breach the high voltage battery when lifting from under the vehicle. When using rescue tools, pay special attention to ensure that you do not breach the battery from inside vehicle cabin. Refer to Chapter 2: Lift Areas for instructions on how to properly lift the vehicle.

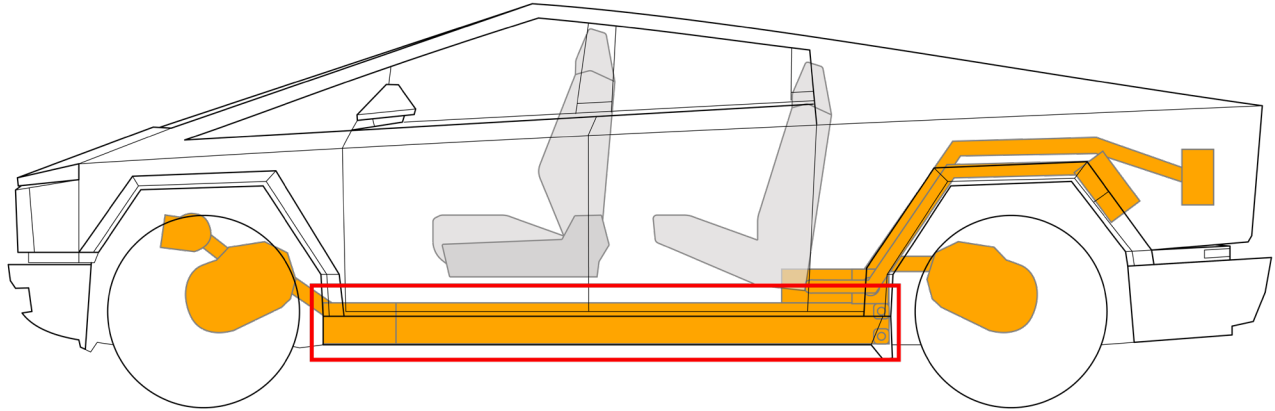

Pushing on the Vehicle Floor

The floor of the vehicle is the high voltage battery. At no time should the high voltage battery pack be compromised with rescue tools.




WARNING Never push on the floor inside of Cybertruck. Doing so can breach the high voltage battery or damage the high voltage cables, which can cause serious injury or death.




High Voltage Power Cable / Busbar / Component

High voltage cables and busbars are shown in orange. There are high voltage cables and busbars that run the length of the battery pack on the bottom side through an extrusion providing protection. Do not compromise these high voltage components with rescue tools. The assumption should be made that there may be high voltage present in the orange high voltage cables at all times.

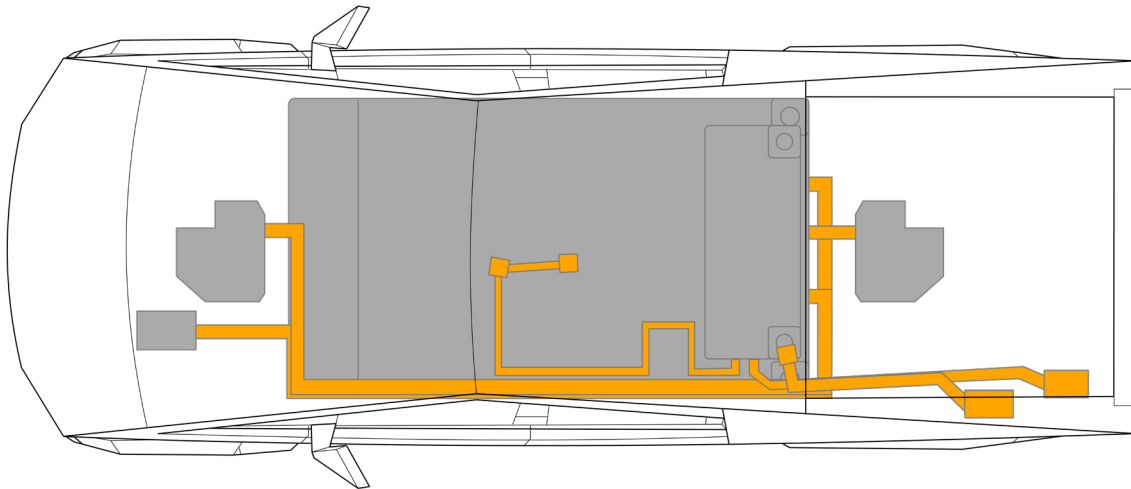


Drive Units

The rear drive unit is located between the rear wheels, as well as the second rear drive unit, if equipped. The front drive unit is located between the front wheels. The drive inverter is located within the drive unit. The drive units convert Direct Current (DC) from the high voltage battery into Alternating Current (AC) that the drive units use to power the wheels.

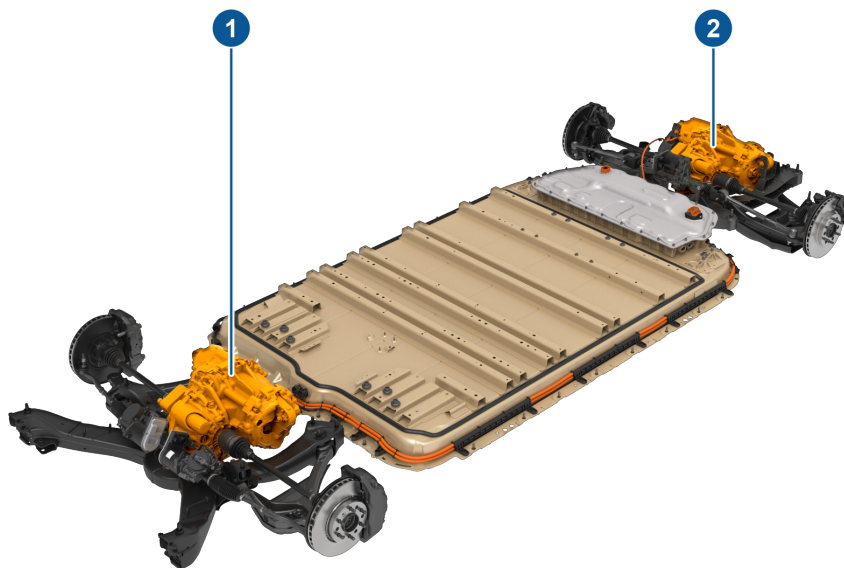


1. Front Drive Unit
2. Rear Drive Unit




Low Voltage Battery Pack

In addition to the high voltage system, Cybertruck has a low voltage electrical system (classified as mid-voltage in some locales). The battery of the low voltage electrical system is charged by the high voltage system. The low voltage battery operates the restraint system, seats, airbags, windows, door locks, touchscreen, and interior and exterior lights. The 48V low voltage battery, outlined in red, is located under the hood and the plastic access panel.

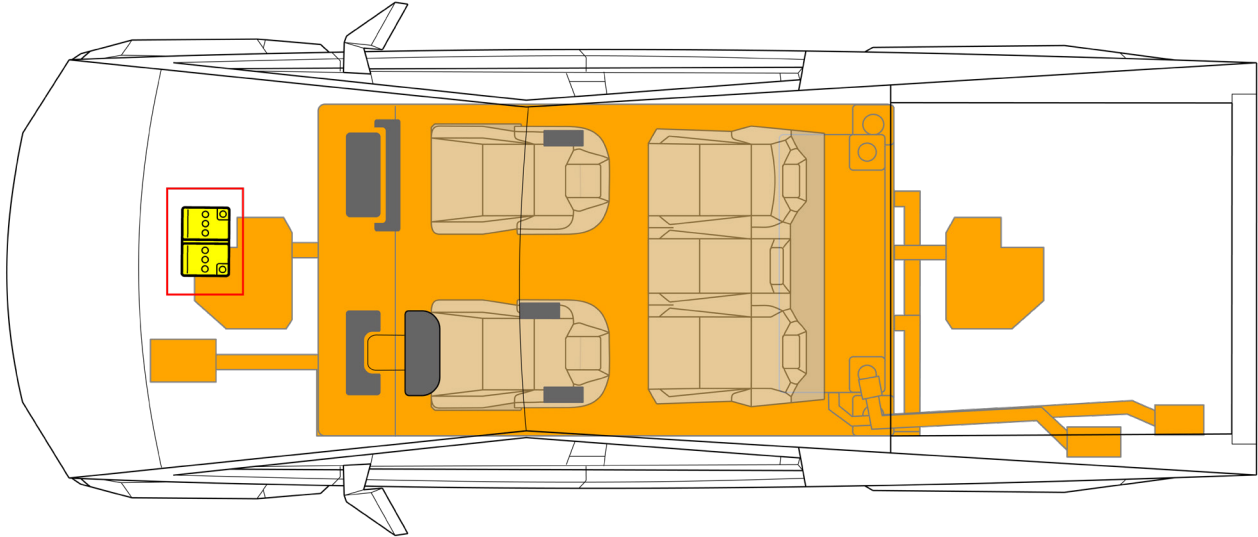


WARNING Cutting the low voltage battery cables doesn't always disable the low voltage system. Cybertruck is designed with redundancies that use the high voltage system to power the low voltage system.

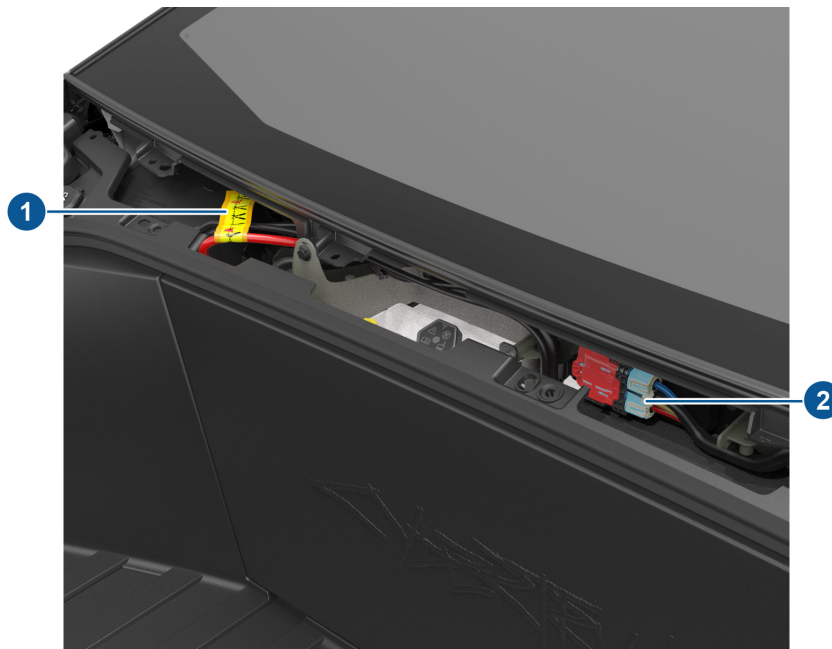

1. First Responder Cut Loop
2. Low Voltage Battery

6. In case of fire

Firefighting



MONITOR HV BATTERY TEMPERATURE FOR AT LEAST 24 HOURS



USE WATER TO FIGHT A HIGH VOLTAGE BATTERY FIRE. If the battery catches fire, is exposed to high heat, or is generating heat or gases, use water to cool the battery. It can take between approximately 3,000-8,000 gallons (11,356-30,283 liters) of water, applied directly to the battery, to fully extinguish and cool down a battery fire; always establish or request additional water supply early. If water is not immediately available, use CO₂, dry chemicals, or another typical fire-extinguishing agent to fight the fire until water is available.

NOTE: Tesla does not recommend the use of foam on electric vehicles.

Apply water directly to the battery. If safety permits, lift or tilt the vehicle for more direct access to the battery (see chapter 2). Water may be applied from a safe distance **ONLY** if a natural opening (such as a vent or opening from a collision) already exists. Do not open the battery for the purpose of cooling it.

Tesla does not recommend placing the vehicle in a large container full of water. The use of a Thermal Image Camera or Infrared (TIC or IR) is recommended to monitor battery temperatures during the cooling process. Continue to use water until the battery has reached ambient temperatures or below, indicated by the thermal image camera. When utilizing a thermal image camera, allow enough time, once the application of water has stopped, to allow for heat within the battery to transfer to the battery enclosure.

Extinguish small fires that do not involve the high voltage battery using typical vehicle firefighting procedures.

During fire extinguishing, do not make contact with any high voltage components. Always use insulated tools for fire extinguishing.



Heat and flames can compromise airbag inflators, stored gas inflation cylinders, gas struts, and other components which can result in unexpected excessive heat, which can cause inflation cylinder explosion. Perform an adequate knock down before entering a hot zone.



Battery fires can take up to 24 hours to fully cool. After suppression and smoke has visibly subsided, a thermal image camera can be used to actively measure the temperature of the high voltage battery and monitor the trend of heating or cooling. There must be no fire, smoke, audible popping/hissing, or heating present in the high voltage battery for at least 45 minutes before the vehicle can be released to second responders (such as law enforcement, vehicle transporters, etc.). The battery must be completely cooled before releasing the vehicle to second responders or otherwise leaving the incident.

There is always a risk of battery re-ignition. Drain excess water out of the vehicle by tilting or raising the front of the vehicle approximately 30 cm (1 foot). This operation can assist in mitigating possible re-ignition.

Due to potential re-ignition, a Cybertruck that has been involved in a submersion, fire, or a collision that has compromised the high voltage battery should be stored in an open area at least 50 feet (15 m) from any exposure.



WARNING During all firefighting activities, consider the vehicle energized. Always wear full PPE including a Self-Contained Breathing Apparatus (SCBA).

High-Voltage Battery — Fire Damage



Similar to conventional and other electric and hybrid vehicles, a burning battery releases super-heated gases and toxic vapors. This release may include volatile organic compounds, hydrogen gas, carbon dioxide, carbon monoxide, soot, particulates containing oxides of nickel, aluminum, lithium, copper, cobalt, and hydrogen fluoride. Responders should always protect themselves with full PPE, including a SCBA, and take appropriate measures to protect civilians downwind from the incident.



A damaged high voltage battery can create rapid heating of the battery cells. If you notice smoke, steam, or audible popping or hissing coming from the high voltage battery, assume that it is heated and take appropriate action as described above.

7. In case of submersion

Treat a submerged Cybertruck like any other submerged vehicle. The body of Cybertruck does not present a greater risk of shock because it is in water. However, handle any submerged vehicle while wearing the appropriate PPE for water rescue. Remove the vehicle from the water and continue normal disabling procedures as outlined in Chapter 3.

Vehicles that are waterlogged or have been submerged in water should be handled with greater caution due to the potential risk of electrical fire. After removing the vehicle from the water and completing disabling procedures, raise the front of the vehicle approximately 30 cm (1 foot) to allow water to drain out of the vehicle and the high voltage battery pack.

Submerged or waterlogged vehicles must be transported and stored more carefully. When loading the vehicle for towing, use a Thermal Image Camera or Infrared (TIC or IR) to monitor battery temperatures and check for potential hot spots and continue monitoring until the vehicle is taken away. Store the vehicle outside at a safe distance at least 50 ft/15 M from other vehicles and structures.



WARNING Do not use firefighting foams with vehicles that were submerged or waterlogged with salt water. The use of firefighting foams on vehicles saturated with salt water have a higher risk of electrical fire.

8. Towing / transportation / storage



The rear motor in the Cybertruck can generate power when the wheels spin. Always transport with all four tires off of the ground. Ensure that the tires are unable to spin at any time during transport.



WARNING NEVER TRANSPORT THE VEHICLE WITH THE TIRES IN A POSITION WHERE THEY CAN SPIN. DOING SO CAN LEAD TO SIGNIFICANT DAMAGE AND OVERHEATING. IN RARE CASES EXTREME OVERHEATING MAY CAUSE THE SURROUNDING COMPONENTS TO IGNITE.



WARNING POSSIBLE BATTERY RE-IGNITION! AFTER A FIRE INCIDENT, STORE OUTSIDE AT A SAFE DISTANCE (50 FT/15 M) FROM OTHER VEHICLES AND STRUCTURES!

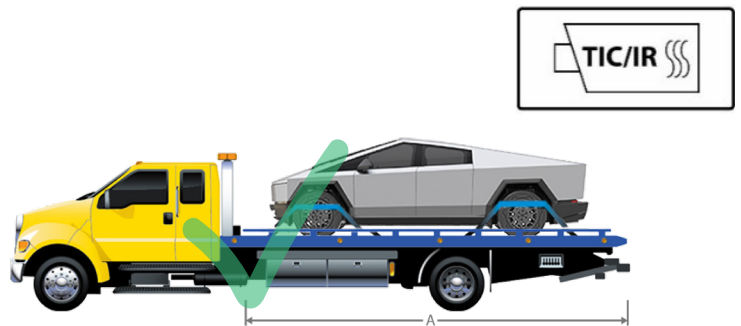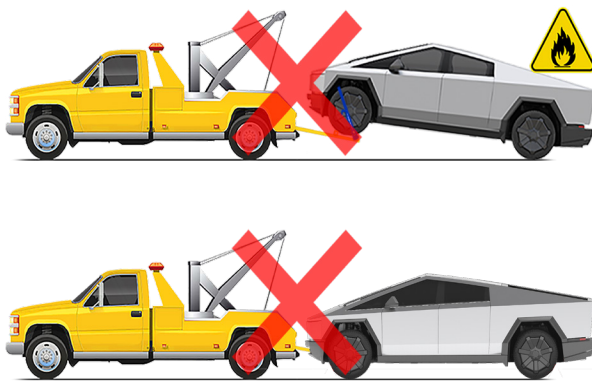

A roll-back truck or comparable transport vehicle is the recommended method of transport. The vehicle can face either direction when using a flatbed. Due to the weight of the vehicle, dollies are not recommended for transport.

NOTE: The tires are allowed to rotate slowly (under 3 mph or 5 km/h) and for a very short distance (less than 30 feet or 10 meters) only when Tow Mode is enabled while the vehicle is being winched onto a flatbed truck or pulled out of a parking space for repositioning. Exceeding these boundaries can lead to significant damage and overheating that is not covered by the warranty.

NOTE: Enable Tow Mode on the vehicle's touchscreen before winching the vehicle onto a flatbed truck. If Tow Mode is not available or the touchscreen is not accessible, self-loading dollies or tire skates must be used to load the vehicle into the approved transportation position. Tesla is not responsible for any damage caused by or during transport of the vehicle, including personal property damage or damage caused by using self-loading dollies or tire skates.



WARNING The vehicle is equipped with high voltage components that may be compromised as a result of a collision. Before transporting, it is important to assume these components are energized. Always follow high voltage safety precautions (wearing personal protective equipment, etc.) until emergency response professionals have evaluated the vehicle and can accurately confirm that all high voltage systems are no longer energized. Failure to do so may result in serious injury.

Pushing the Vehicle



WARNING The following instructions are intended to be used when only moving Cybertruck a very short distance to improve traffic safety. Refer to the Owner's Manual on the touchscreen for more instructions on how to transport Cybertruck. Damage caused by transporting the vehicle is not covered by the warranty.



WARNING Pushing Cybertruck when it is not in Neutral or Tow Mode can result in overheating the rear motor and potential risk of shock if electrical components are exposed, even if the first responder loop has been cut.

In situations where there is minimal risk of fire or high voltage exposure (for example, the vehicle does not accelerate after coming to a stop at an intersection) and low voltage power is present, Cybertruck can be quickly pushed in order to clear the roadway. If a driver is present, simply shift Cybertruck into Neutral (N) on the touchscreen drive strip and then push the vehicle. If a driver is not present, Cybertruck may automatically shift into Park when it detects the driver leaving the vehicle (even if it has previously been shifted into Neutral).

To keep Cybertruck in Neutral (which disengages the parking brake and allows the vehicle to be pushed) without a driver present, use the touchscreen to activate Tow Mode:

1. Ensure Cybertruck is in Park by long pressing Park (P) on the touchscreen drive strip or the overhead console.
2. Press and hold the brake pedal, then on the touchscreen touch **Controls > Service > Towing**.
3. Touch the Enter Tow Mode button. Cybertruck is now free-rolling and can slowly be rolled (no faster than walking speed) or winched.

To cancel Tow Mode, shift Cybertruck into Park.

NOTE: Cybertruck must detect a key nearby and low voltage power is required for Tow Mode to activate.

NOTE: Tow Mode automatically cancels and the parking brake is applied if Cybertruck is rolled faster than 5 mph (8 km/h) or low voltage power becomes low or absent. Cybertruck sounds its horn if Tow Mode is about to cancel.

NOTE: If Cybertruck cannot detect the key (an authenticated smartphone or key), the Tow Mode button is grayed out and Tow Mode cannot be enabled. Call Tesla Roadside Assistance.


NOTE: The touchscreen is unresponsive if Cybertruck has no low voltage power. Use an external low voltage power supply to open the hood and jump start the vehicle's low voltage system. See the Owner's Manual or call Tesla Roadside Assistance for instructions.

NOTE: If airbags are deployed, you cannot drive Cybertruck. Do not push or move the vehicle unless you can enable Tow Mode. Otherwise, you must first secure the wheels for transport.

Jump Starting the Vehicle

In situations where there is minimal risk of fire or high voltage exposure and low voltage power is not present, you can jump-start the vehicle using an external power supply. To jump start the vehicle:

1. Open the powered frunk to access the front trunk area (see Chapter 4: Access to the Occupants).
2. Remove the maintenance panel by pulling it upwards to release the trim clips that hold it in place.
3. Connect the external low voltage power supply's red positive (+) cable to the horizontal positive (+) jump post mounted next to the brake fluid reservoir.

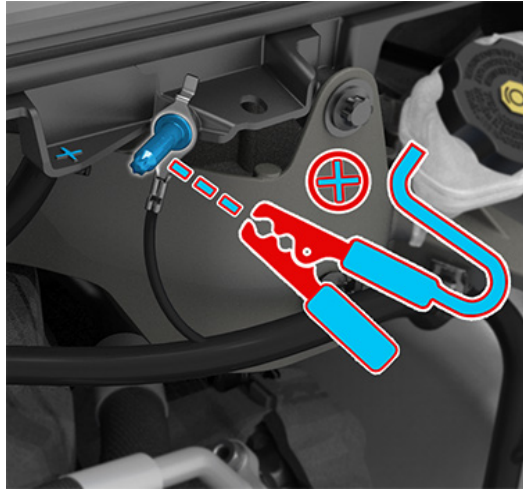

4. Connect the low voltage power supply's black negative (-) cable to the vertical jump post. The negative jump post is marked with a (-) sign.



5. Turn on the external power supply (refer to the manufacturer's instructions). Touch the vehicle touch-screen to wake it up. This may take several minutes.

NOTE: If using a variable power supply, set the supplied voltage to a value between 12V and 16.5V, or between 30V and 50V. Do not change the supplied voltage while cables are connected.

6. Switch off or disconnect the power supply when low voltage power is no longer needed. If attempting to enable Tow Mode, leave the power supply turned on and connected until vehicle is secured.
7. Disconnect the cables, beginning with the black negative cable.

9. Important additional information

This document contains important instructions and warnings that must be followed when handling Cybertruck in an emergency situation.



WARNING Always use appropriate rescue tools and always wear appropriate PPE. Failure to follow these instructions can result in serious injury or death.



WARNING Regardless of the disabling procedure you use, ALWAYS ASSUME THAT ALL HIGH VOLTAGE COMPONENTS ARE ENERGIZED! Cutting, crushing, or touching high voltage components can result in serious injury or death.



WARNING After deactivation, the high voltage circuit requires 2 minutes to de-energize.



WARNING The RCM has a backup power supply with a discharge time of approximately 10 seconds. Do not touch the RCM within 10 seconds of airbag or pre-tensioner deployment.



WARNING Handling a submerged vehicle without appropriate PPE for water rescue can result in serious injury or death.



WARNING When fire is involved, consider the entire vehicle energized. Always wear full PPE, including a SCBA.



WARNING When cutting the first responder loop, double cut the loop to remove an entire section. This mitigates the risk of the cut wires accidentally reconnecting.



WARNING When using the high voltage shut down methods recommended by this document, high voltage power is isolated to the battery. The high voltage battery is always energized.



WARNING Never transport the Cybertruck with rear wheels on the ground. Doing so can lead to significant damage and overheating. In rare cases, extreme overheating may cause the surrounding components to ignite.

Contact Us

First Responders and Second Responders with emergencies, call Tesla Roadside Assistance. Refer to <https://www.tesla.com/support/roadside-assistance> for the applicable number.

Refer to <https://www.tesla.com/firstresponders> for the Owner's Manual and first responder information. First responders and training officers with questions, contact firstrespondersafety@tesla.com.

10. Explanation pictograms used

	In some working environments, the Infrared (IR) device is referred to as a Thermal Image Camera (TIC).
	Refers to the hood of a vehicle and follows with detailed procedure for opening the hood both with and without power available.
	Refers to the trunk of a vehicle and follows with detailed procedure for opening the trunk with power.
	Warning
	Flammable
	Explosive
	Corrosive substances present
	Hazardous to human health
	Acute toxicity
	Contains gases under pressure
	Use water to extinguish
	Electricity warning